


TPS107S-55W-POLY 55 W Poly Crystalline Solar Module



Not Your Average Solar Provider

Our Products Categories

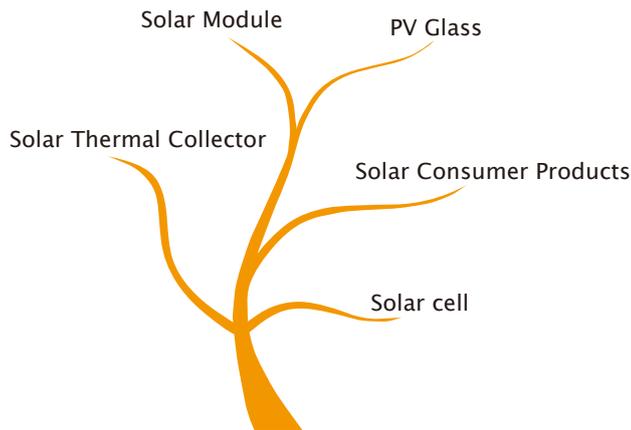

Professional Solar Provider Since 1992

Key Feature

- Plus power tolerance: +3%
- Independent research anti-reflective and self-cleaning glass surface reduces power loss from dirt and dust
- Excellent performance under low light environments, create better kWh/kW ratio and produce average 2-3% more electricity


Best Quality

- Junction box and bypass diodes guarantee the modules free of overheating and “hot spot effect”
- 100% EL double-inspection ensures modules are defects free

Certification



Electrical Characteristics

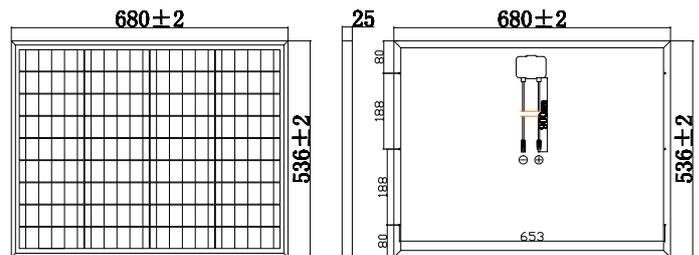

MECHANICAL SPECIFICATION


Cell Type	Poly crystalline 158.75*158.75mm
Number of cells	36pcs
Dimensions	680x536x25mm
Front Glass	3.2mm Low iron tempered glass
Frame	Anodized aluminum alloy
Connector	MC4 PLUG
Output Cables	Length 0.9m

PERFORMANCE AT STANDARD TEST CONDITION (STC:1000W/m²,25°C,AM1.5)

Module Series	TPS107S-55W-POLY
Maximum Power at STC(Pmax)	55W (+/-5%)
Short Circuit Current(Isc)	3.11A
Open Circuit Voltage(Voc)	22.68V
Maximum Power Current(Imp)	2.89A
Maximum Power Voltage(Vmp)	19.08V

ABSOLUTE MAXIMUM LIMITS

Parameters	Unit	Rating
Operation temperature	°C	-40 to +85
Storage temperature	°C	-40 to +85

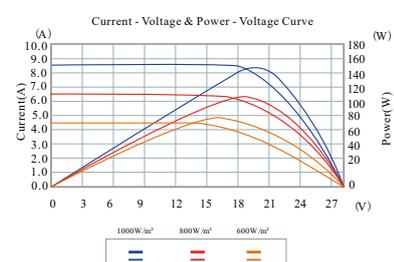

NOTE:READ SAFETY AND INSTALLATION INSTRUCTIONS OR CONTACT THE TECHNICAL SERVICE FOR FURTHER INFORMATION BEFORE USING THE PRODUCT.
© Mar 2013 Shenzhen Topray Solar Co.Ltd. All right reserved. Specifications included in this datasheet are subject to change without notice.